



DIN-Winkel-Presskabelschuhe (DIN 46235)

- Werkstoff: E-Cu Rohr
- Oberfläche: verzinkt



Cosse de câble angulaire DIN (DIN 46235)



- Matière: tube en cuivre électrolytique
- Surface: étamée



DIN-Winkel-Presskabelschuhe

Cosses de câble angulaire DIN

	KZ No		Leiter/Conducteur mm²	d1	d3	d2	b	l	a
DIN-6-06-W	5		6	3.8	5.5	6.4	8.5		10.0
DIN-10-06-W	6		10	4.4	6.0	6.4	10.0	13.0	10.0
DIN-10-08-W						8.4	13.0	15.0	
DIN-16-06-W	8		16	5.5	8.5	6.4	13.0	14.3	20.0
DIN-16-08-W						8.4	13.0	16.3	
DIN-16-10-W						10.5	16.5	18.3	
DIN-16-12-W						13.0	19.0	19.3	
DIN-25-06-W	10		25	7.0	10.0	6.4	15.0	15.5	20.0
DIN-25-08-W						8.4	16.0	17.5	
DIN-25-10-W						10.5	16.0	19.5	
DIN-25-12-W						13.0	19.0	20.5	
DIN-35-08-W	12		35	8.2	12.5	8.4	17.0	18.8	20.0
DIN-35-10-W						10.5	19.0	20.8	
DIN-35-12-W						13.0	21.0	21.8	
DIN-50-08-W	14		50	9.8	14.5	8.4	20.0	19.8	28.0
DIN-50-10-W						10.5	22.0	21.8	
DIN-50-12-W						13.0	24.0	22.8	
DIN-50-16-W						17.0	27.0	25.8	
DIN-70-08-W	16		70	11.3	16.5	8.4	24.0	20.8	28.0
DIN-70-10-W						10.5	24.0	22.8	
DIN-70-12-W						13.0	24.0	23.8	
DIN-70-16-W						17.0	29.0	26.8	
DIN-95-10-W	18		95	13.5	19.0	10.5	28.0	24.0	35.0
DIN-95-12-W						13.0	28.0	25.0	
DIN-95-16-W						17.0	32.0	28.0	
DIN-120-10-W	20		120	15.5	21.0	10.5	32.0	25.5	35.0
DIN-120-12-W						13.0	32.0	26.5	
DIN-120-16-W						17.0	32.0	29.5	
DIN-150-10-W	22		150	17.0	23.5	10.5	34.0	26.8	35.0
DIN-150-12-W						13.0	34.0	27.8	
DIN-150-16-W						17.0	34.0	30.8	
DIN-150-20-W						21.0	34.0	34.8	
DIN-185-12-W	25		185	19.0	25.5	13.0	37.0	28.8	40.0
DIN-185-16-W						17.0	37.0	31.8	
DIN-185-20-W						21.0	40.0	35.8	
DIN-240-12-W	28		240	21.5	29.0	13.0	42.0	30.5	40.0
DIN-240-16-W						17.0	42.0	33.5	
DIN-240-20-W						21.0	42.0	37.5	
DIN-300-16-W	32		300	24.5	32.0	17.0	48.5	35.0	50.0
DIN-300-20-W						21.0	48.5	39.0	

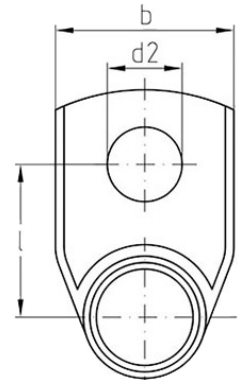

CHF (exkl. MWST / excl. TVA)
freileibend / sans engagement