


Flachstecker, isoliert, gelb

2,5 - 6,0 mm², easy entry

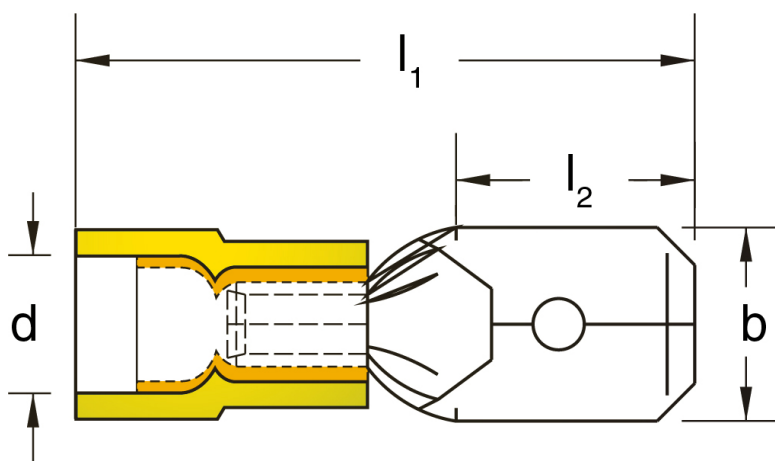

Art. Nr.	Werkstoff	Isolation		
IFS-6	Cu-ETP, gal Sn	PA transp.	1,200/1000	100

	l1	l2	d	b
in mm:	24.5	7.5	6.6	6.4

	Steckgrösse	s	
in mm:	6.3 x 0.8		