


Ringkabelschuh, isoliert, gelb

4,0 - 6,0 mm², easy entry

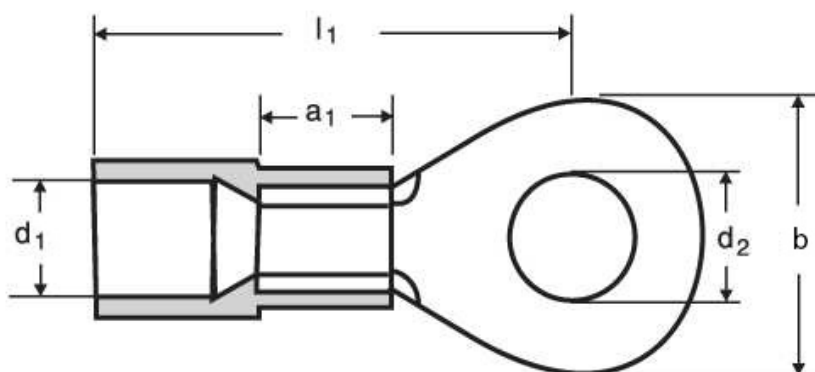

Art. Nr.	Werkstoff	Isolation		
IR-6-10	Cu-ETP, gal Sn	PA transp.	3,00/1000	50

	d1	d2	b	
in mm:	6.6	10.5	18	

	l1	a1	s	
in mm:	27	6	1	