



Presskabelschuhe PEKA/iCrimp

- Werkstoff: E-Cu Rohr
- Oberfläche: verzinkt




Cosses de câble à sertir PEKA/iCrimp

- Matière: tube en cuivre électrolytique
- Surface: étamée




Presskabelschuhe PEKA/iCrimp

	Leiter/Conducteur mm ²	d1	d3	d2	b	l	a
150-10	150	16.8	21.3	10.5	31.0	56.5	29.0
150-12				13.0	31.0	56.0	
150-14				15.0	31.0	57.0	
150-16				17.0	31.0	58.0	
150-20				21.0	35.0	63.0	
185-08	185	19.0	24.0	8.4	35.0	63.0	30.0
185-10				10.5	35.0	63.0	
185-12				13.0	35.0	63.0	
185-14				15.0	35.0	61.0	
185-16				17.0	35.0	63.0	
185-20				21.0	35.0	66.0	
240-12	240	21.0	26.0	13.0	38.0	71.5	35.0
240-14				15.0	38.0	69.0	
240-16				17.0	38.0	69.5	
240-20				21.0	38.0	71.0	
300-12	300	24.0	30.0	13.0	44.0	82.0	42.0
300-14				15.0	44.0	84.0	
300-16				17.0	44.0	85.0	
300-20				21.0	44.0	85.0	
400-16	400	27.5	33.5	17.0	49.0	92.0	47.0
400-20				21.0	49.0	92.0	

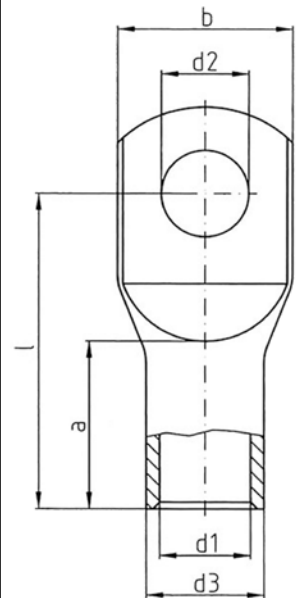

Winkel-Presskabelschuh PEKA/iCrimp

	Leiter/Conducteur mm ²	d1	d3	d2	b	l	a
6-06-W	6	3.5	6.5	6.4	11.0	13.3	8.0
6-08-W				8.4	15.0	15.3	
10-06-W	10	4.5	7.0	6.4	12.0	12.5	9.0
10-08-W				8.4	15.0	15.5	
10-10-W				10.5	18.0	17.5	
10-12-W				13.0	20.0	18.5	
16-06-W	16	5.5	8.5	6.4	12.0	14.3	12.0
16-08-W				8.4	15.0	16.3	
16-10-W				10.5	18.0	18.3	
16-12-W				13.0	20.0	19.3	
25-06-W	25	7.0	10.0	6.4	15.0	15.5	14.0
25-08-W				8.4	16.0	17.5	
25-10-W				10.5	18.0	19.5	
25-12-W				13.0	20.0	20.5	
25-14-W				15.0	22.0	22.5	

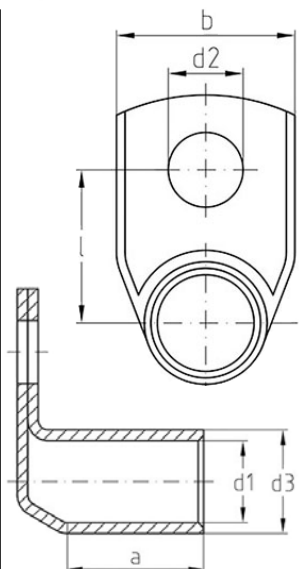

CHF (exkl. MWST / excl. TVA)
freibleibend / sans engagement



Presskabelschuhe PEKA/iCrimp

- Werkstoff: E-Cu Rohr
- Oberfläche: verzinkt



Cosses de câble à sertir PEKA/iCrimp



- Matière: tube en cuivre électrolytique
- Surface: étamée



Winkel-Presskabelschuh PEKA/iCrimp

Cosses de câble angulaire PEKA/iCrimp

	Leiter/Conducteur mm ²	d1	d3	d2	b	l	a
35-06-W	35	8.5	12.0	6.4	17.0	16.5	16.0
35-08-W				8.4	17.0	18.5	
35-10-W				10.5	20.0	20.5	
35-12-W				13.0	22.0	21.5	
35-14-W				15.0	23.0	23.5	
50-06-W	50	10.0	14.0	6.4	20.0	17.5	18.0
50-08-W				8.4	20.0	19.5	
50-10-W				10.5	20.0	21.5	
50-12-W				13.0	23.0	22.5	
50-14-W				15.0	23.0	24.5	
50-16-W				17.0	27.0	28.5	
70-08-W	70	12.0	16.5	8.4	24.0	20.8	20.0
70-10-W				10.5	24.0	22.8	
70-12-W				13.0	24.0	23.8	
70-14-W				15.0	25.0	25.8	
70-16-W				17.0	28.0	26.8	
95-08-W	95	13.5	18.0	8.4	26.0	21.5	22.0
95-10-W				10.5	26.0	23.5	
95-12-W				13.0	26.0	24.5	
95-14-W				15.0	26.0	26.5	
95-16-W				17.0	28.0	27.5	
120-10-W	120	15.0	20.0	10.5	29.0	24.5	25.0
120-12-W				13.0	29.0	25.5	
120-14-W				15.0	30.0		
120-16-W				17.0	30.0	28.5	
150-10-W	150	16.8	21.3	10.5	31.0	25.7	28.0
150-12-W				13.0	31.0	26.7	
150-14-W				15.0	31.0	26.7	
150-16-W				17.0	31.0	29.7	
150-20-W				21.0	35.0	33.7	
185-12-W	185	19.0	24.0	13.0	35.0	28.0	29.0
185-14-W				15.0	35.0	28.0	
185-16-W				17.0	35.0	31.0	
185-20-W				21.0	35.0	35.0	
240-12-W	240	21.0	26.0	13.0	38.0	29.0	34.0
240-14-W				15.0	38.0	29.0	
240-16-W				17.0	38.0	32.0	
240-20-W				21.0	38.0	36.0	
300-12-W	300	24.0	30.0	13.0	43.0	31.0	41.0
300-14-W				15.0	44.0	31.0	
300-16-W				17.0	43.0	34.0	
300-20-W				21.0	43.0	38.0	

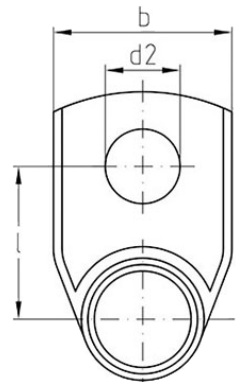

3

CHF (exkl. MWST / excl. TVA)
freileibend / sans engagement